SSP-561 SPEAKERPHONES

Stainless Steel, Vandal Resistant, Rugged Speakerphone Panels Built to Last

The CEECO Model SSP-561 vandal resistant, stainless steel, handsfree speakerphones offer clear, reliable communication suitable for courtesy, emergency, and entrance security for locations such as hospitals, colleges, airports, and buildings. These large panel speakerphones come equipped with press to start, press to stop call button for the initiation and termination of phone call operation and an LED visual call process indication light. Also available are features such as Call restrictions, ADA, and speed dial. These panels include the flush rough-in mounting box and can be flush mounted into a customer's designed mounting or can be mounted on the wall with our optional attractive wall mounting box (-SW).

Made in the USA 🇺🇸

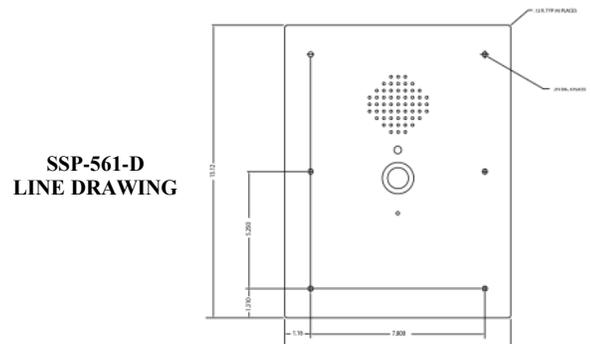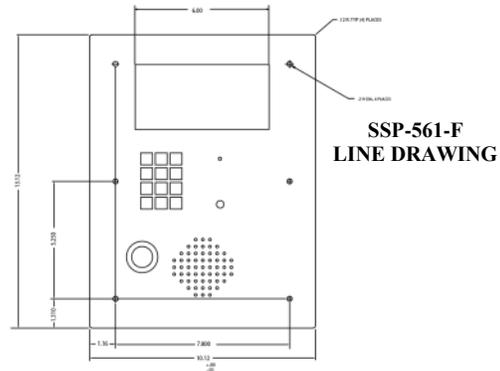| Features |
| --- |
| **Vandal Resistant, Stainless Steel Construction with Security Hardware** |
| **Flush Mount with Rough-In Mounting Box Included** |
| **Handsfree Operation with Adjustable Conversation Timer** |
| **Phone can not be left off-hook. Phone will reset itself when called party disconnects** |
| **Programmable Call Restrictions** |
| **Flush rough-in mounting box Included or Optional attractive Wall Mounting Box (-SW)** |
| **Line Powered** |
| **1 Year Warranty and Lifetime Support** |

SPECIFICATIONS

INPUT POWER:	C.O. Line Powered
LOOP CURRENT:	30ma min to 80ma max
IMPEDANCE:	600 Ohms
SIGNALING:	DTMF 70 ms tone, 50 ms spacing
OUTPUT:	-4.0 to –6.0 dbm
ENVIRONMENTAL:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity 0%-90% non-condensating
RINGER EQUIVALENCY:	0.4A
FACEPLATE:	Brushed 16 ga. Stainless Steel
PANEL:	13 1/8"H x 10 1/4" W
OPTIONAL WALL MOUNT:	13 1/8" H x 10 1/4"W x 2 5/8" D
WEIGHT:	8 lbs. (10 lbs with Wall Mount Box)
FCC REGISTRATION:	Registered
UL LISTED NO.:	6OF5
TYPE JACK:	RJ11C

ACCESSORIES:

301-064	Security Tool (required for installation)

SSP-561-F LINE DRAWING

SSP-561-D LINE DRAWING

Providing Telecommunication Solutions Since 1930

SSP-561 SPEAKERPHONES

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST

SSP-561-F	SSP-561-FD-ADA	SSP-561-D / SSP-561-X	SSP-561-D-ADA / SSP-561-D2-ADA
The **SSP-561-F** speakerphone with keypad provides DTMF dialing. Phone can be programmed for call restrictions and blocking, speed dial, conversation time-out, and PBX prefix dialing. Stainless steel design with puncture and weatherproof speaker, metal keypad, and security screw installation make this phone ideal for your toughest environments.	The **SSP-561-FD** Telephone (SSP-561-FD-ADA shown above) provides call restriction capabilities to include call blocking. For example: block 1+ calling, can be programmed to dial an access code, allow or block incoming calls, provide separate conversation timers or no timed call for both autodial and keypad from 1-9 minutes, and adjustable wink detect length if necessary.	The **SSP-561-D** stainless steel, wall speakerphone with push button automatic dialer, can be programmed to dial a PBX access number, allow or block incoming calls, provide conversation time-out or no time-out. The **SSP-561-X** is for ring down circuits, inbound calls, and direct connect applications Includes wall mounting steel backplate and tamper resistant security hardware.	The **SSP-561-D-ADA** (shown with optional –ADA feature) stainless steel speakerphone is equipped with Braille 'EMER' emergency plate and LED indicator light that changes color to show call progress Also can be programmed to dial a PBX access number, allow or block incoming calls, and provide conversation time-out. The **SSP-561-D2** will dial a second number if called party doesn't answer.
SSP-560-F	**FD Low power not available**	**SSP-560-D OR X**	**Read Below about Low Power**
The **SSP-560-F** is a low power consumption speakerphone with keypad that does not have the additional smart features.	**SSP-561-FD** Programmable speakerphone is not available in a low power version. Please see above.	The **SSP-560-D OR X** available in low power speakerphones.	Full function ADA features are not available on low power models. The **SSP-561-D2** telephone is not available in low power.
Dimensions: 10 1/4"W x 13 1/8"H **Weight:** 8lbs Tap Here for Product Detail	**Dimensions:** 10 1/4"W x 13 1/8"H **Weight:** 8lbs Tap Here for Product Detail	**Dimensions:** 10 1/4"W x 13 1/8"H **Weight:** 8lbs Tap Here for Product Detail	**Dimensions:** 10 1/4"W x 13 1/8"H **Weight:** 8lbs Tap Here for Product Detail

IP- Voice over Internet Protocol Version available on all models (SIP)

-SS Super Smart Features to include: Voice Announcement (VA), Auto Answer (AA), and Remote Programming (RA).

*Visit our website at www.ceeco.net or call us at 863-357-0798
For more information on our Optional Wall Mounts*

*CEECO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEECO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product.
We offer support for the life of the product! CEECO is devoted to giving you the quality and service you deserve.*

Providing Telecommunication Solutions Since 1930