


SSC-501 SPEAKERPHONES

Vandal Resistant, Stainless Steel Wall Telephone Built to Last

CEEEO's SSC-501 series speakerphones are designed for applications involving high use and abuse that require handsfree operation. Their imposing design and impressive durability often helps to deter vandalism, while making them easy to locate. The high grade stainless steel finish makes them aesthetically pleasing yet effortless to maintain, and their tamper resistant chrome plated instruction window makes it accommodating for customers to add specific instructions for their users. These phones are also available with ADA features to include a Red Pushbutton, EMER emergency braille plate and call process indicator LED light. The SSC-500 series offer basic functions with the lowest current draw, which are well suited for areas that have limited use of power. Our security, emergency, and public communication speakerphones are built to last and supported by over 80 years of experience.



Made in the USA 

SPECIFICATIONS

INPUT POWER:	C.O. Line Powered or PBX
LOOP CURRENT:	33ma min to 80ma max
IMPEDANCE:	600 ohms
SIGNALING:	DTMF
ENVIRONMENTAL:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity 0%-90% non-condensating
RINGER EQUIVALENCY:	0.4A
FACEPLATE:	Brushed 16 ga. Stainless Steel
DIMENSION:	7 1/2" W x 21" H x 4 1/8" D
MOUNTING:	Standard Coinless Public telephone foot print
WEIGHT:	16 lbs.
TYPE JACK:	RJ11C
FCC REGISTRATION:	Registered
UL LISTED NO.:	60F5

ACCESSORIES:

301-037	Security Tool (required for installation)
---------	--



Features

Measurements:

7 1/2" W x 21" H x 4 1/8" D

Stainless Steel Construction with Tamper Resistant Hardware

Tamper Resistant Chrome Plated Instruction Window with Area for Customer's Specified Instructions


Puncture and Waterproof Speaker

Phone can not be left off-hook as it detects when called party hangs up and resets itself.

Compatible Type "1" Payphone Mounting Backplate Included

301-037 Security Tool Required for Installation

1 Year Warranty and Lifetime Support

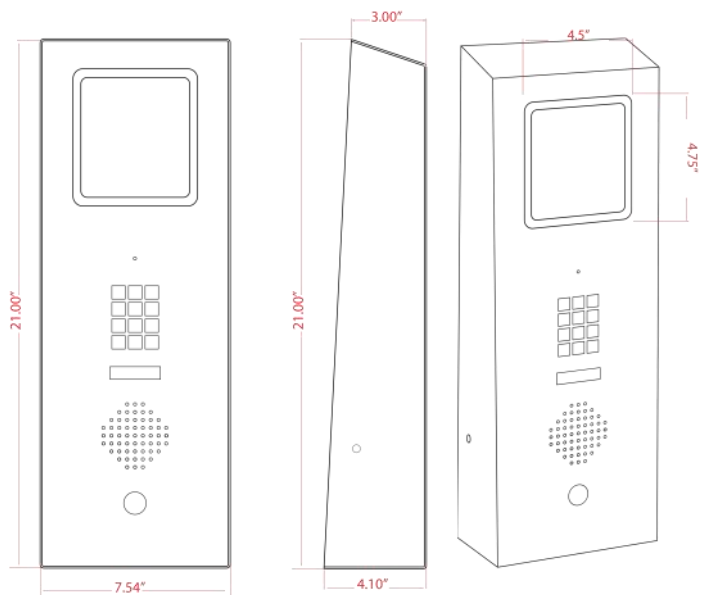

Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

Web: www.ceeco.net

Email: sales@ceeco.net

519 SW Park Street






Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006

SSC-501 SPEAKERPHONES

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST

				
SSC-501-F	SSC-501-D	SSC-501-D-ADA	SSC-501-D2	SSC-501-X
Dimensions: 7 1/2" W x 21" H x 4 1/8" D Product Link: Click here	Dimensions: 7 1/2" W x 21" H x 4 1/8" D Product Link: Click here	Dimensions: 7 1/2" W x 21" H x 4 1/8" D Product Link: Click here	Dimensions: 7 1/2" W x 21" H x 4 1/8" D Product Link: Click here	Dimensions: 7 1/2" W x 21" H x 4 1/8" D Product Link: Click here
The SSC-501-F vandal resistant, stainless steel, large wall mount speakerphone equipped with chrome tone dial keypad and tamper resistant security screws has a backplate that is compatible with existing type "1" coin and payphone enclosures. These attractive phones are popular as "easy to locate" courtesy and emergency phones because of their imposing size and impressive durability.	The SSC-501-D hands free phone is an automatic dialer with a Press to start/Press to stop button for initiation and termination of phone calls. The phone can be programmed to automatically dial a single number up to eleven (11) digits in length. It may also be programmed to dial a preceding PBX or other access number. Commonly used in any location that requires pushbutton speaker phone communication.	The SSC-501-D-ADA speakerphone is an automatic dialer with a Press to start/ Press to stop button for initiation and termination of phone calls. Additionally, this phone provides visual indication of call progress by way of a changing color LED light as well as a Braille "EMER" emergency plate. Commonly used in areas that requires an ADA (American Disability Act) feature phone.	Our SSC-501-D2 vandal resistant, stainless steel autodial payphone size speakerphone, with Press to start/Press to stop push button for initiation and termination of phone calls is equipped with an automatic dialer that will dial a second number if called party doesn't answer. Commonly used in areas where it is important to reach one of the called parties.	The SSC-501-X vandal resistant, stainless steel, wall mount, payphone size telephone, is equipped with push button for ring-down operation that provides the "off-hook" condition, and talk path for two-way, hands free communication. This telephone connection is configured through customers PBX, phone system, or power supply.
SSC-500-F	SSC-500-D	Low Power Options Not Available	Low Power Options Not Available	SSC-500-X
The SSC-500-F is a low powered chrome tone dial speakerphone. These phones are popular in prisons and jails.	The SSC-500-D is a low powered automatic dialer speakerphone commonly used in prisons and jails.	There are no low powered options for ADA equipped speakerphones.	There are no low powered options for smart speakerphones.	The SSC-500-X is a low powered "Ring-Down" speakerphone
SMART FEATURES (available for 501 models — NOT for low power 500 models)				
-AA	Automatic Answer	-VA	Voice Announcement	
-RP	Remote Programming	-AA-VA-RP	Any Combination or all Smart Features can be added	
IP - Voice over Internet Protocol Version available on all models (SIP)			CUSTOMIZATION - Call us for additional options and features	

Visit our website at www.ceeco.net or call us at 863-357-0798 for detailed specifications on any of our models.



CEE CO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product. We offer support for the life of the product! CEE CO is devoted to giving you the quality and service you deserve.

Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

Web: www.ceeco.net

Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006