


# SSW-521 SPEAKERPHONES

## Stainless Steel, Vandal Resistant, Rugged Speakerphones Built to Last

The CEECO Model SSW-521 vandal resistant, stainless steel speakerphones offer clear, reliable communication. Our handsfree phones are available with keypad (-F), autodial (-D), and ring-down (-X) operation. The rugged SSW speakerphones are suitable for courtesy, emergency, and public communication. The speakerphone operation is a press to start, press to stop call button for the initiation and termination of phone calls with an LED visual call process indication light. Call restrictions, ADA, and speed dial features available.

- Allow or block incoming calls
- Automatically dial a PBX or access number
- Resets after call party disconnects, cannot be left off-hook.
- Call restriction features programmable
- Time calls at different time increments
- Muted microphone during dial tone to eliminate fraud attempts



Made in the USA 

### SPECIFICATIONS

POWER:	C.O. Line powered
LOOP CURRENT:	30mA min. to 80mA max.
LOOP CURRENT:	27mA min. to 80mA max. (low power)
IMPEDANCE:	600 ohms
SIGNALING:	DTMF, 70ms tone, 50ms spacing
OUTPUT:	-4.0dbm to -6.0dbm
ENVIRONMENTAL:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity 0% to 90% non-condensating
PROGRAMMING:	Via DTMF keypad.
DIMENSIONS:	5"W X 10 3/4 "H X 3 1/2"D
MOUNTING:	Vertical surface mount
MEMORY RETENTION:	Non-volatile memory retention
WEIGHT:	7 Pounds
TYPE JACK:	RJ11C

### ACCESSORIES:

301-037	Security Tool (required for installation)
---------	--



### FEATURES

Measurements: 5"W x 10 3/4"H x 3 1/2"D

Brushed Stainless Steel Construction

Wall Mount Installation, includes Steel Backplate

Tamper Resistant Security Hardware


Puncture and Weather Proof Speaker

Low Powered versions available (View next page for models)

Optional ADA features available

Optional 2nd Number Autodial -D2 available

Line Powered

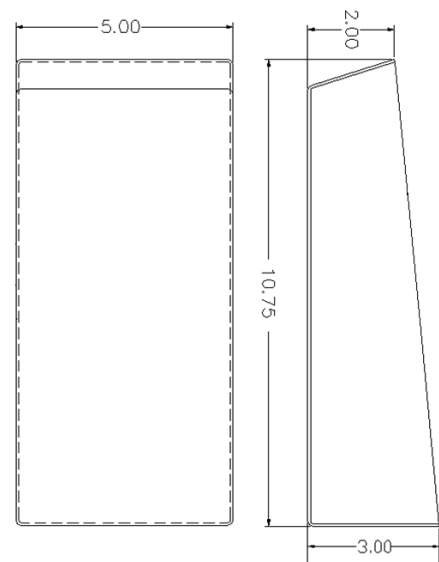

*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

Web: [www.ceeco.net](http://www.ceeco.net)

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street  
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006

# SSW-521 SPEAKERPHONES

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST



**SSW-521-F**



**SSW-521-D**



**SSW-521-D2**



**SSW-521-X**

The **SSW-521-F** handsfree speakerphone with keypad provides DTMF dialing. Phone can be programmed for call restrictions and blocking, speed dial, conversation time-out, and PBX prefix dialing. Stainless steel design with puncture and weatherproof speaker, metal keypad, and security screw installation make this phone ideal for your toughest environments.

The **SSW-521-D** stainless steel, wall speakerphone with push button automatic dialer, can be programmed to dial a PBX access number, allow or block incoming calls, provide conversation time-out or no time-out. Wink detect length can be programmed if necessary. Includes wall mounting steel backplate and tamper resistant security hardware.

The **SSW-521-D2-ADA**(picture shown with optional –ADA feature) stainless steel, wall speakerphone is equipped with Braille 'EMER' emergency plate and LED indicator light that changes color to show call progress. Speakerphone can be programmed to dial a PBX access number, allow or block incoming calls, and provide conversation time-out .

The **SSW-521-X** handsfree wall speakerphone with push button ring-down operation and mounting backplate. The X model is designed for ring down circuits, inbound calls, direct connect applications. Stainless steel construction and red LED light indicates the phone is active.

**SSW-520-F**

The **SSW-520-F** is a low power consumption. speakerphone with keypad dialing. Designed for locations that require a rugged speakerphone with keypad, but do not need additional smart features.

**SSW-520-D**

The **SSW-520-D** low power handsfree autodial speakerphone provides reliable communication. Autodial can be programmed to dial from 1-11 digits. Time-out feature available in 1, 3, or 5 minute increment.

**D2 not available**

**SSW-521-D2** hot line autodial telephone is not available in a low power version. Please see above telephone.

**SSW-520-X**

The **SSW-520-X** ring-down speaker phone provides the "off-hook" condition, and talk path for two-way, hands free communication. Phone connection is configured through your PBX, phone system, or power supply.

**Dimensions:**  
5"W x 10 3/4"H x 3 1/2"D  
**Weight:** 6lbs

**Dimensions:**  
5"W x 10 3/4"H x 3 1/2"D  
**Weight:** 6lbs

**Dimensions:**  
5"W x 10 3/4"H x 3 1/2"D  
**Weight:** 6lbs

**Dimensions:**  
5"W x 10 3/4"H x 3 1/2"D  
**Weight:** 6lbs

**IP** - Voice over Internet Protocol Version available on all models

**CUSTOMIZATION** - Call us for MORE options and features

Visit our website at [www.ceeco.net](http://www.ceeco.net) or call us at 863-357-0798 for detail specifications on any of our models.



*CEE CO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEE CO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product. We offer support for the life of the product! CEE CO is devoted to giving you the quality and service you deserve.*

**Providing Telecommunication Solutions Since 1930**

Communication Equipment  
& Engineering Company

Web: [www.ceeco.net](http://www.ceeco.net)

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street  
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006