

**SERVICE MANUAL**

**FOR**

**MODEL WPP-530-F**

**HANDS FREE**  
**WEATHERPROOF TELEPHONE**

**OR**

**MODEL SSP-510- F**

**HANDS FREE STAINLESS STEEL**  
**PANEL TELEPHONE**

**EQUIPPED WITH 730-ANS DIAL &**  
**LOW-POWER SPEAKER BOARD**



---

Serving the Telephone Industry Since 1930

---

*Communication Equipment  
& Engineering Company*

519 West South Park St.

Okeechobee, FL. 34972

Voice: 863-357-0798

Fax: 863-357-0006

---

# IMPORTANT INFORMATION FOR CUSTOMER

Please fill in before you continue.

The following information is necessary when calling CEECO for assistance.

MODEL NUMBER	MODEL WPP-530-F OR SSP-510-FX, EQUIPPED WITH 730-ANS DIAL & LOW-POWER SPEAKER BOARD
SERIAL NUMBER	
DATE MANUFACTURED	
LOCATION INSTALLED	

**For us to better serve you, please have this information available when calling for technical support.**

## **CEECO** Communication Equipment and Engineering Company

519 West South Park Street  
Okeechobee, FL. 34972

(863) 357-0798 Voice  
(863) 357-0006 Fax

## TABLE OF CONTENTS

<b><u>SECTION</u></b>	<b><u>PAGE</u></b>
<b>1.0 INTRODUCTION.....</b>	<b>4</b>
<b>2.0 GENERAL.....</b>	<b>4</b>
<b>3.0 PROGRAMMING .....</b>	<b>5</b>
<b>4.0 TESTING/OPERATION .....</b>	<b>7</b>
<b>5.0 RECOMMENDED TOOLS AND TEST EQUIPMENT .....</b>	<b>7</b>
<b>6.0 INSTALLATION NOTES AND ASSEMBLY INSTRUCTIONS .....</b>	<b>8</b>
<b>7.0 SPECIFICATIONS.....</b>	<b>10</b>
<b>8.0 PARTS LIST: .....</b>	<b>11</b>
<b>9.0 FCC NOTICE.....</b>	<b>12</b>
<b>10.0 REPAIR AND RETURN INFORMATION.....</b>	<b>13</b>
<b>11.0 WARRANTY POLICY .....</b>	<b>14</b>

## 1.0 INTRODUCTION

The practices in this manual provide installation and maintenance information for the CEECO Model WPP-530-F hands free weatherproof Telephone or the SSP-510-F hands free stainless steel panel telephone.

The information in this manual is subject to change without notification.

For information not included in this manual, please call or write:

**CEECO**  
Customer Service  
519 West South Park Street  
Plantation, FL 33313

(863) 357-0798  
(863) 357-0006 (FAX)

## 2.0 GENERAL


- 2.1 The CEECO Model WPP-530-F or SSP-510-F Hands Free Telephone is a sturdy, vandal resistant, stainless steel panel speakerphone. Instead of a hookswitch and handset, the WPP-530-F or SSP-510-F has a Press to start/Press to stop button for the initiation and termination of phone calls. This telephone operates as a standard Touch Tone dialing unit by way of the alpha-numeric, satin-chrome keypad. The low-power speaker board provides lower power consumption than the standard handsfree model. Manual volume control is also provided inside the phone, by way of an adjustable "POT". This should only be attempted by a qualified technician.
- 2.2 Programming is accomplished manually on the PCB.

## 3.0 PROGRAMMING

**NOTE:** It is recommended that you ground yourself to prevent ESD damage to the PCB(s).

- 3.1 The phone can be programmed to **automatically disconnect a phone call** after the elapse of a selected period of time (**1, 3 or 5 minutes**). This is accomplished through the manipulation of mini-jumpers on the Printed Circuit Board.
- 3.2 Remove the telephone from the package and place it on a suitable protective surface so that the internal components may be accessed.
- 3.3 The Printed Circuit Board, has **two plastic mini-jumpers** on it. These mini-jumpers are used to program the Time Out Disconnect feature. Locate the plastic **mini-jumper** that has **“JP3”** written above it in small white print on the PC board. Below it, in small white print, appear the words **“ON”** and **“OFF”**. Place the mini-jumper across the middle and far-left copper pins. This is the "ON" position, which activates the Time Out Disconnect feature. **When** the automatic call disconnect feature is **not desired**, the **jumper** should be in the **“OFF”** position (jumper bridges the middle and far right copper pins). Please refer to the diagram on the following page for assistance in locating the mini-jumpers.
- 3.3 When utilizing the Automatic Call Disconnect feature (Call Time-out), a choice of 1, 3, or 5 minutes is available. Locate the plastic **mini-jumper** on the Printed Circuit Board, which has above it **“JP2”** in small white print. Below it are **“5”**, **“3”** and **“1”** also in small white print. Place the jumper so that it bridges the two copper pins corresponding with your selection of **1, 3, or 5 minutes**. Please refer to the diagram on the following page for assistance in locating the mini-jumpers.
- 3.4 **Programming** is now **complete** and the telephone is ready for testing/operation.

### 3.5 PROGRAMMING DIAGRAM

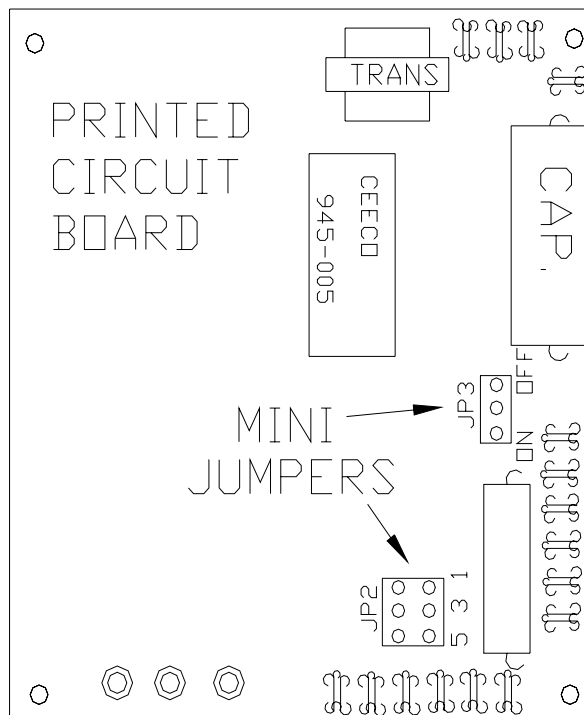

## 4.0 TESTING/OPERATION

Action: Connect the phone to the desired telephone line. Press the call button and use the keypad to place a call as desired.

Reaction: The red LED illuminates (if equipped). The telephone emits the corresponding DTMF tones call. When the call is connected by the Central Office or PBX, a normal half duplex speakerphone conversation may take place.

Action: Finish the conversation and press the "CALL" button to hang up.

Reaction: The red LED goes out. (If equipped) and the call is terminated.

Note: If the phone is not hung up, it will automatically disconnect if it has been programmed it as such (refer to section 3.0).

## 5.0 RECOMMENDED TOOLS AND TEST EQUIPMENT

Security Tool, CEECO part number 301-064

Insulated Needle Nose Pliers

Flat Blade/Phillips Head Screwdriver

## 6.0 INSTALLATION NOTES AND ASSEMBLY INSTRUCTIONS


- 6.1 Using a 301-064 security tool (sold separately), loosen and remove the security screws.
- 6.2 The security tool is for a standard 5/32" button head screw generally used on the framework of the phone booths.
- 6.3 Separate the faceplate assembly from the weatherproof housing by pulling the faceplate forward.
- 6.4 Run the inside station wire into the enclosure and terminate on the RJ11C terminal block inside, as depicted on the following page. The CEECO provided terminal block (jack) **must** be used, as it contains required over-voltage protection circuitry.
- 6.5 The use of a gas tube station protector is recommended. The station ground should not exceed 50 ohms.
- 6.6 Plug the modular line cord from the faceplate assembly into the RJ11C terminal block.
- 6.7 Dress the telephone line cord and AC cable away from the security screws and seat the faceplate into the weatherproof housing.
- 6.8 Secure the cover assembly by tightening the security screws.

### **WARNING**

- A. Never install telephone wiring during a lightning storm.**
- B. Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.**
- C. Never touch uninsulated telephone wires or terminals, unless the telephone line has been disconnected at the network interface.**
- D. Use caution when installing or modifying telephone lines.**



### 6.9 OVER-VOLTAGE PROTECTION DIAGRAM

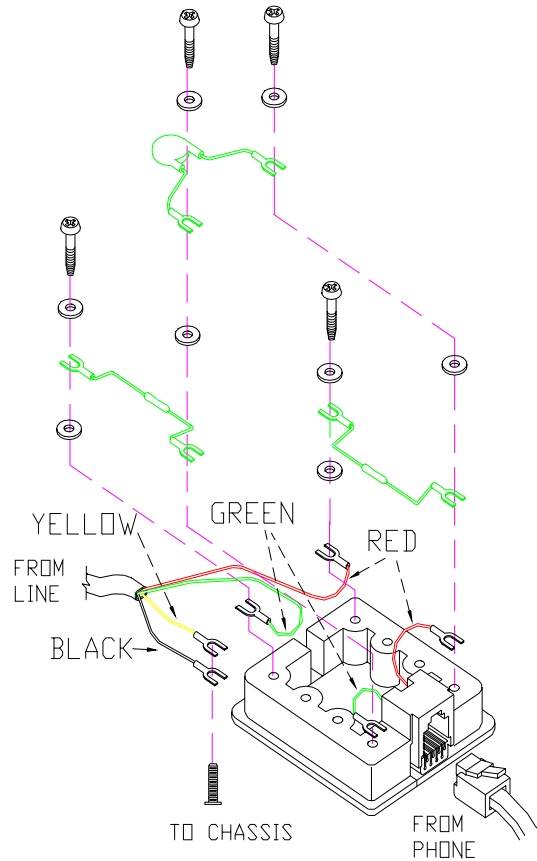

PROPRIETARY

**CONFIDENTIAL**

This drawing and all information contained therein is confidential and is the exclusive property of CEECO and may not be copied, reproduced or disclosed to anyone, in any manner whatsoever, or used for any purpose other than for which it is provided to you, without the prior written permission of CEECO.

## 7.0 SPECIFICATIONS

1.	INPUT POWER	C.O. Line powered
2.	LOOP CURRENT	27ma. min. 80ma. max.
3.	IMPEDANCE	600 ohms
4.	SIGNALING	DTMF, 70ms tone, 50ms spacing
5.	OUTPUT	-4.0 to -6.0dbm
6.	ENVIRONMENTAL	Temperature 0c to 50c Humidity 20%-90% non condensating
7.	PROGRAMMING	Via DTMF keypad.
8.	DIMENSIONS: Stainless Steel Panel (SSP)	7 1/6" wide x 11 1/4" high x 4 1/4" deep (handset on hook).
9.	PANEL MOUNTING (SSP)	Vertical Surface Mount
10.	WEIGHT ( SSP)	Approximately 4lb.
11.	DIMENSIONS: Weatherproof Housing (WPP)	9 1/2" wide x 12 5/8" high x 8" deep (including door).
12.	WEATHERPROOF HOUSING (WPP)	Cast aluminum
13.	HOUSING MOUNTING (WPP)	4 holes spaced 8" x 5 7/8" x 13/32"
14.	HOUSING WEIGHT (WPP)	Approximately 12 pounds
15.	MEMORY RETENTION	Non-volatile memory retention
16.	FCC REGISTRATION NO.	BW-88T7-13716-TE-N
17.	TYPE JACK	RJ11C
18.	U.L. LISTED NO.	6OF5

**8.0 PARTS LIST:**

<b>QUANTITY</b>	<b>PART NUMBER</b>	<b>DESCRIPTION</b>
4	331-006	OUTER COVER SECURITY SCREW
1	301-018	MODULAR LINE CORD
1	301-054	MODULAR CONNECTOR (RJ11C)
1	660-100	CEECO LPSPKR BOARD
1	12017	RINGER
1	6020-B	MOMENTARY PANEL SWITCH
1	N/A	SERVICE MANUAL
1	14123	SPEAKER
1	530-F OR 510-F	FACE PLATE
1	331-005	WEATHERPROOF HOUSING
1	730-ANS	ALPHA-NUMERIC SATIN-CHROME KEYPAD AND TOUCH TONE DIAL.
1	301-064	SECURITY TOOL

## 9.0 FCC NOTICE

### 9.1 FCC REGISTRATION AND REPAIR INFORMATION

Your new telephone has been registered with the Federal Communication Commission (FCC) in accordance with Part 68 of its rules. The FCC requires that you be advised of certain requirements involving the use of this telephone.

### 9.2 CONNECTION AND USE WITH THE NATIONWIDE TELEPHONE NETWORK.

The FCC requires that you connect this telephone to the Nationwide Telephone Network through a registered jack provided by the Telephone Company in your area. This jack is a modular outlet, which you can order from your local telephone company.

### 9.3 NOTIFICATION TO THE TELEPHONE COMPANY

Before connecting this telephone, the FCC requires that you notify your local telephone company business office. The number is in the front of your phone book.

*Tell them:*

The "line" to which you will connect the telephone (that is, your phone number), the telephone's FCC registration number and ringer equivalence number. These numbers are listed in section 7.0

The FCC further requires that you notify your local telephone company when permanently disconnecting this telephone.

## **10.0 REPAIR AND RETURN INFORMATION**

### **10.1 WARRANTY REPAIR**

Any device returned requiring warranty service, repair or credit must be accompanied with a "Return Material Authorization" (RMA) FORM. It must include: return shipping instructions, original purchase order number and special marking instruction. A description of the trouble observed must be attached to the defective unit. This information must be inside the shipping container.

### **10.2 DIRECT ALL INQUIRES TO:**

**CEECO**  
Repair Department  
519 West South Park Street  
Okeechobee, FL. 34972

(863) 357-0798  
(863) 357-0006 Fax

### **10.3 NON-WARRANTY REPAIR**

CEECO will repair equipment out of warranty for a set charge plus parts. The customer must pay the shipping costs for both directions.

### **10.4 RETURN FOR CREDIT**

Material may be returned for credit only with prior approval. Material authorized for return is subject to a 20% restocking charge based on the manufacturer's list price. Return Material Authorization must be requested no later than 30 days after original shipment.

### **10.5 EXCHANGE POLICY**

If a replacement unit is required it will be shipped in the most expedient manner consistent with the urgency of the situation. Please contact "Customer Service" for instructions regarding exchange of modules or printed circuit boards.

## **11.0 WARRANTY POLICY**

### **11.1 GENERAL**

CEECO products are guaranteed to be free of defects in material and workmanship for a period of 365 days from the date of original purchase. CEECO's obligation under this warranty is limited to repair or replacement of any part found to be defective by CEECO. Under no circumstances shall CEECO be liable for loss, damage, cost of repair or consequential damages of any kind which have been caused by neglect, abuse, acts of GOD or improper operation of equipment.

### **11.2 PRINTED CIRCUIT BOARDS**

Printed circuit boards should not be field repaired. If a unit is found to be faulty, replace it with another unit and return the faulty unit to CEECO for repair. Modifications by anyone other than CEECO will void the warranty.