

# HOB-333-F SPECIFICATIONS

## HANDSET TELEPHONE PANEL WITH KEYPAD & SMART FEATURES IN A OPEN ENCLOSURE STEEL HOUSING


*Standard Analog Power, but also available in VoIP versions*

Weather and vandal resistant stainless steel phone in an open enclosure wall mount black housing with telephone emblem on sides. Designed for keypad dialing with call restrictions. Programmable prefix or access dialing capability, call time duration setting from no limit up to 30 minutes, allow or block incoming calls, and 40 (1-11 digits) speed dialing locations or speed dial only software. Equipped with marine quality chrome tone dial keypad and mechanical hookswitch or optional (-M) magnetic hookswitch, ID window, 32" hearing aid compatible armored cord handset, and tamper resistant security screws. HOB models available in black, (-R) red, or (-S) stainless steel.







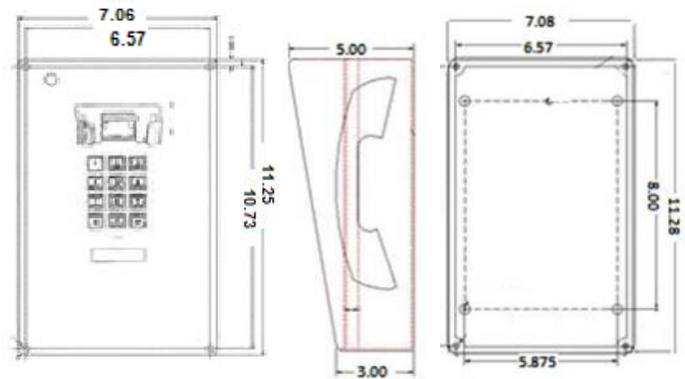


### SPECIFICATIONS

<b>Panel Size:</b>	7 1/6"W x 11 1/4"H
<b>Open Enclosure Housing:</b>	7 1/4"W x 11 1/2"H x 5"D
<b>Weight:</b>	Approximately 10 lbs.
<b>Mounting Instructions:</b>	Open Enclosure Housing 4 holes spaced 8" x 5 7/8"
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via DTMF Keypad
<b>Memory Retention:</b>	Lithium Battery-Long Life
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	25mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>Hearing Aid Compatible:</b>	Meets EIA standards
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-064 Security Tool (required for installation)



### ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-M	-IVC	-ACH**	-LB	Open Enclosure Housing	-RIL	-RIS
						
<b>Sealed Magnetic Hookswitch</b> . Completely Sealed . No Moving Parts	Push Button Volume Control  Background Noise reducer	Other Length armored cord from 12" to 72"(inches). Example: <b>-ACH12</b> 12" Long	Handset with internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing <b>-R</b> Red Housing <b>-S</b> Stainless Steel Housing	Ring Indicator Light located on the phone panel for visual ring indication	Ring Indicator Light located on the phone panel for visual ring indication



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006