

SSC-301-D SPECIFICATIONS

LARGE WALL HANDSET TELEPHONE WITH AUTODIAL


Standard Analog Power, but also available in VoIP versions

Vandal resistant stainless steel wall mount telephone for standard keypad dialing. Equipped with marine quality chrome tone dial keypad and mechanical hookswitch, instruction or advertising window, ID window, 32" hearing aid compatible armored cord handset with internal steel lanyard, which is anchored into the housing for added strength, tamper resistant security screws, and backplate for easy wall mounting or installation with existing type "1" coin and payphone enclosures.



SPECIFICATIONS

| | |
|----------------------------------|---|
| Panel Size: | 7.5" W x 21" H x 4.10" D 6.5" D With handset on Hook |
| Weight: | Approximately 16 lbs. |
| Mounting Instructions: | Vertical Surface Mount: Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided. |
| Environment: | Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensing |
| Input Power: | Telephone Line Powered |
| Programming: | Via mini-Jumpers on ATD 11 Board |
| Loop Current: | 23mA min to 80mA max |
| Impedance: | 600 ohms |
| Type Jack: | RJ11C |
| Ringer Equivalency: | 0.4A |
| Hearing Aid Compatible: | Meets EIA standards |
| UL& FCC Registration: | Certified |
| ACCESSORIES: | 301-037 Security Tool (required for installation) |

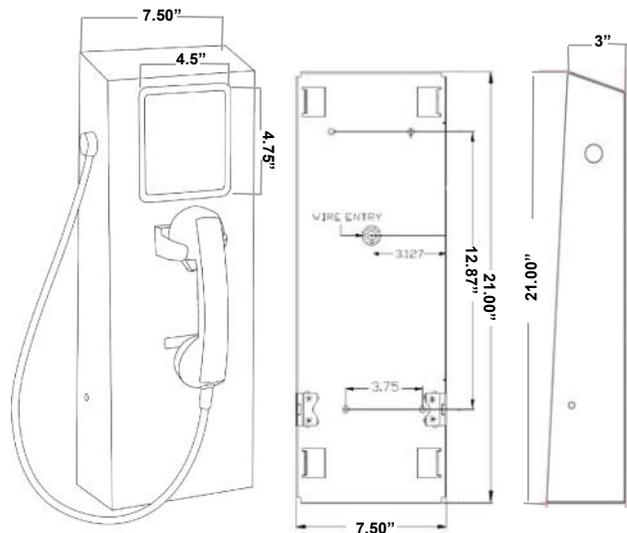

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

| -M | -IVC | -ACH** | -ACH* | -CCH* | -RIL | -RIS |
|---|---|---|---|--|--|--|
| | | | | | | |
| Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts | Push Button Volume Control • Background Noise reducer | Other Length armored cord from 12" to 72"(inches). Example: -ACH12 12" Long | ACHW -White Handset ACHR -Red Handset (Black is standard) | Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long | Ring Indicator Light located on the phone panel for visual ring indication | Ring Indicator Flashing Blue Light (Requires AC Power) |



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

http://www.ceeco.net
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL

Voice 863-357-0798
Fax 863-357-0006