

SSC-501-D SPECIFICATIONS

LARGE WALL SPEAKERPHONE WITH AUTODIAL


Standard Analog Power, but also available in VoIP versions

Stainless steel wall mount payphone size handsfree speakerphone that automatically dials a preprogrammed number from 1-11 digits when the button is pushed and red/green LED light provides visual indication of call progress. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.



SPECIFICATIONS

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Panel Size: | 7.5" W x 21" H x 4.10" D |
| Weight: | Approximately 16 lbs. |
| Mounting Instructions: | Vertical Surface Mount: Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided |
| Environment: | Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating |
| Programming: | Via DTMF Keypad |
| Input Power: | Telephone Line Powered |
| Loop Current: | 30mA min to 80mA max |
| Impedance: | 600 ohms |
| Type Jack: | RJ11C |
| Ringer Equivalency: | 0.4A |
| UL & FCC Registration: | Certified |
| ACCESSORIES: | 301-037 Security Tool (required for installation) |

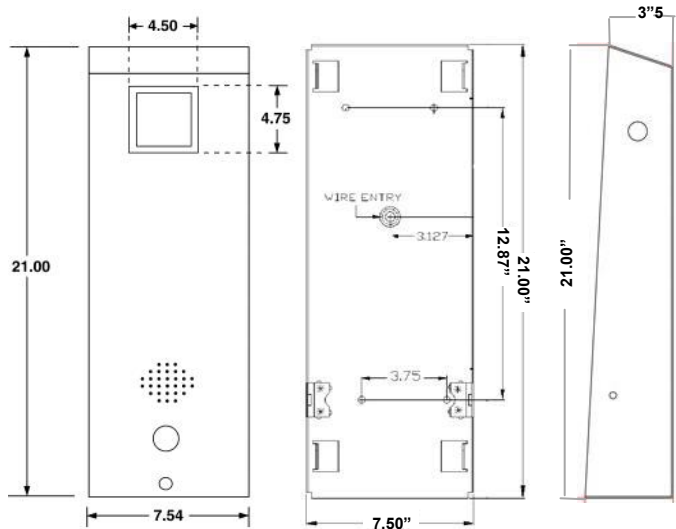

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

| -ADA | -RIS | -RIL | Additional Options & Features |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------|
| | | | Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA) |
| <ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button | Ring Indicator Flashing Blue Light (Requires AC Power) | Ring Indicator Light located on the phone panel for visual ring indication | |



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

519 SW Park Street
Okeechobee, FL

<http://www.ceeco.net>

Voice 863-357-0798

Email: sales@ceeco.net

Fax 863-357-0006