# SSC-501-D2 SPECIFICATIONS

## LARGE WALL HANDSFREE AUTODIAL SPEAKERPHONE

***Standard Analog Power, but also available in VoIP versions***

Stainless steel wall mount payphone size handsfree speakerphone that automatically dials a preprogrammed number from 1-11 digits when the button is pushed. If there is no answer when first number is dialed, phone will reset itself and dial a second preprogrammed number and red/green LED light provides visual indication of call progress. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.

### SPECIFICATIONS

| | |
|---|---|
| **Panel Size:** | 7.5" W x 21" H x 4.10" D |
| **Weight:** | Approximately 16 lbs. |
| **Mounting Instructions:** | **Vertical Surface Mount:** Separate the cover assembly from the backplate The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided |
| **Environment:** | Temperature: -30°C (-22°F) to 60°C (140°F)<br>Humidity: 0%-90% non-condensating |
| **Programming:** | Via DTMF Keypad |
| **Input Power:** | Line Powered |
| **Loop Current:** | 30mA min to 80mA max |
| **Impedance:** | 600 ohms |
| **Type Jack:** | RJ11C |
| **Ringer Equivalency:** | 0.4A |
| **UL & FCC Registration:** | Certified |
| **ACCESSORIES:** | 301-037 Security Tool<br>**(required for installation)** |

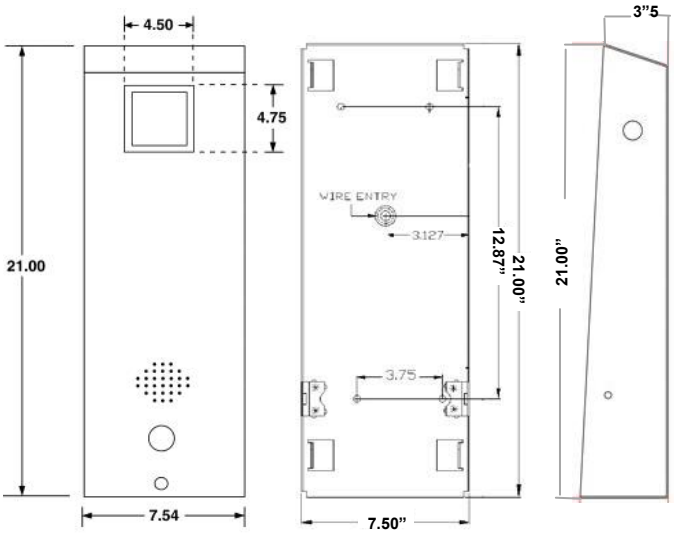


### ADDITIONAL OPTIONS

**IP - Voice over Internet Protocol Version available on all models (SIP)**

| -ADA | -RIS | -RIL | Additional Options & Features |
|---|---|---|---|
| | | | Auto Answer (AA)<br>Remote Programming (RP)<br>Voice Announcement (VA) |
| • Red/ green LED call progress indicator light<br>• Braille Emergency Plate "EMERG. PHONE"<br>• Red push button | Ring Indicator Flashing Blue Light *(Requires AC Power)* | Ring Indicator Light located on the phone panel for visual ring indication | |

***Providing Telecommunication Solutions Since 1930***


Communication Equipment & Engineering Company
http;//www.ceeco.net
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006