

# SSP-313-DD SPECIFICATIONS

## HANDSET TELEPHONE PANEL WITH TWO AUTODIAL PUSH BUTTON & SMART FEATURES


*Standard Analog Power, but also available in VoIP versions*

Durable stainless steel flush mount panel telephone with two (2) automatic dialer push buttons. Each push button is programmable to dial 1-11 digits and incoming calls may be allowed or blocked. Equipped with marine quality chrome mechanical hookswitch, ID window or optional (-IVC) pushbutton volume control with background noise reduction, and 32" hearing aid compatible armored cord handset. Telephone can be flush mounted or installed in our 331-005 weatherproof or 331-HOB weather resistant housing.



### SPECIFICATIONS

<b>Panel Size:</b>	7 1/6"W x 11 1/4"H 2"D (Behind Panel) 3"D (Front Panel & Handset on Hook)
<b>Weight:</b>	Approximately 6 lbs.
<b>Mounting Instructions:</b>	Flush Mounted Weatherproof Housing Weather Resistant Open Enclosure (HOB)
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via DTMF Keypad
<b>Memory Retention:</b>	Lithium Battery-Long Life
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	25mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>Hearing Aid Compatible:</b>	Meets EIA standards
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-064 Security Tool (only required for installation when in HOB or WPP)

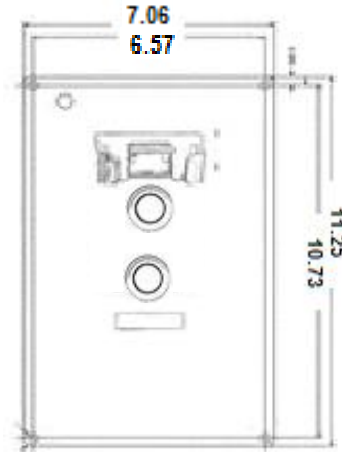

### ADDITIONAL OPTIONS IP - Voice over Internet Protocol Version available on all models (SIP)

-M	-IVC	-CCH*	-LB	Open Enclosure Housing	Weatherproof Housing	-RIL
Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts	Internal Volume Control • Push Button Volume Control • Background Noise reduction	Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long	Handset w/ internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing -R Red Housing -S Stainless Steel Housing	Standard Black & TELEPHONE on Door • -B-EMER Black & EMERGENCY on Door • -R Red & EMERGENCY on Door • -R-TEL Red & TELEPHONE on Door • -Y Yellow & EMERGENCY on Door • -Y-TEL Yellow & Telephone on Door • -G Grey & TELEPHONE on Door • -G-EMER Grey & EMERGENCY on Door	Ring Indicator Light located on the phone panel for visual ring indication.



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006