

SSP-313-E SPECIFICATIONS

TELEPHONE PANEL WITH 12 NUMBER KEYPAD FOR AUTODIAL


Standard Analog Power, but also available in VoIP versions

Durable stainless steel flush mount panel telephone with twelve (12) automatic dialer push buttons. Each push button is programmable to dial 1-23 digits, PBX, prefix, or access dialing capability, and incoming calls may be allowed or blocked. Equipped with a marine quality chrome tone dial keypad with 2 column, 12 button configuration and mechanical hookswitch, label area next to each push button to list destination button will call, ID window, and 32" hearing aid compatible armored cord handset. Telephone can be flush mounted or installed in our 331-005 weatherproof or 331-HOB weather resistant housing.



SPECIFICATIONS

Panel Size:	7 1/6"W x 11 1/4"H 2"D (Behind Panel) 3"D (Front Panel & Handset on Hook)
Weight:	Approximately 6 lbs.
Mounting Instructions:	Flush Mounted Weatherproof Housing (WPP) Weather Resistant Open Enclosure (HOB)
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	VIA DTMF keypad
Memory Retention	Lithium Battery - Long Life
Input Power:	Telephone Line Powered
Loop Current:	25mA min. 80mA max.
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
Hearing Aid Compatible:	Meets EIA standards
UL & FCC Registration:	Certified
ACCESSORIES:	301-064 Security Tool (only required for installation when in HOB or WPP)

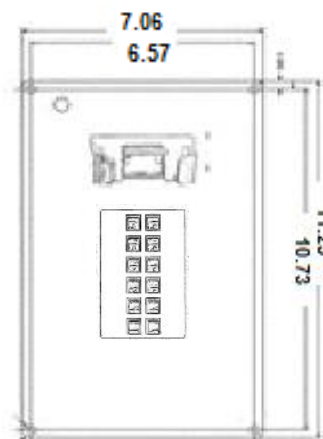

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-M	-CCH*	-LB	Open Enclosure Housing	Weatherproof Housing	-RIL
Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts	Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long	Handset w/ internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing -R Red Housing -S Stainless Steel Housing	Standard Black & TELEPHONE on Door • -B-EMER Black & EMERGENCY on Door • -R Red & EMERGENCY on Door • -R-TEL Red & TELEPHONE on Door • -Y Yellow & EMERGENCY on Door • -Y-TEL Yellow & Telephone on Door • -G Grey & TELEPHONE on Door • -G-EMER Grey & EMERGENCY on Door	Ring Indicator Light located on the phone panel for visual ring indication.



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company
<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006