

# SSP-313-FD SPECIFICATIONS


## STAINLESS STEEL PANEL TELEPHONE WITH SMART FEATURES, KEYPAD AND AUTODIAL BUTTON

Durable stainless steel flush mount panel telephone with keypad and autodial push button. Programmable prefix or access dialing capability, allow or block incoming calls, 40 (1-11 digits) programmable speed dialing locations. Autodial button dials a preprogrammed number from 1-11 digits. Equipped with marine quality chrome tone dial keypad and mechanical hookswitch, ID window or optional (-IVC) pushbutton volume control with background noise reduction, and 32" hearing aid compatible armored cord handset. Telephone can be flush mounted or installed in our 331-005 weatherproof or 331-HOB weather resistant housing.



### SPECIFICATIONS

<b>Panel Size:</b>	7 1/6"W x 11 1/4"H 2"D (Behind Panel) 3"D (Front Panel & Handset on Hook)
<b>Weight:</b>	Approximately 6 lbs.
<b>Mounting Instructions:</b>	Flush Mounted Weatherproof Housing (WPP) Weather Resistant Open Enclosure (HOB)
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	VIA DTMF keypad
<b>Memory Retention</b>	Lithium Battery - Long Life
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	25mA min. 80mA max.
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>Hearing Aid Compatible:</b>	Meets EIA standards
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-064 Security Tool (only required for installation when in HOB or WPP)

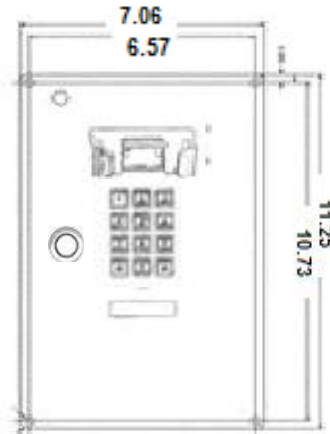

ADDITIONAL OPTIONS				IP - Voice over Internet Protocol Version available on all models (SIP)		
-M	-IVC	-CCH*	-LB	Open Enclosure Housing	Weatherproof Housing 331-005	-RIL
Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts	Internal Volume Control • Push Button Volume Control • Background Noise reduction	Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long	Handset w/ internal steel lanyard (metal braided rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing -R Red Housing -S Stainless Steel Housing	Standard Black & TELEPHONE on Door • -R Red & EMERGENCY on Door • -R-TEL Red & TELEPHONE on Door • -Y Yellow & EMERGENCY on Door • -Y-TEL Yellow & Telephone on Door • -G Grey & EMERGENCY on Door • -G-TEL Grey & TELEPHONE on Door	Ring Indicator Light located on the phone panel for visual ring indication.



Providing Telecommunication Solutions Since 1930