SSP-313-D SPECIFICATIONS

AUTODIAL TELEPHONE PANEL WITH HANDSET & SMART FEATURES

Standard Analog Power, but also available in VoIP versions

Durable stainless steel flush mount panel telephone that will automatically dial a preprogrammed number when the handset is lifted off-hook. Programmable from 1-25 digits, PBX, prefix, or access dialing capability, and incoming call block. Equipped with marine quality chrome mechanical hookswitch, ID window or optional (-IVC) pushbutton volume control with background noise reduction, and 32" hearing aid compatible armored cord handset. Telephone can be flush mounted or installed in our 331-005 weatherproof or 331-HOB weather resistant housing.

SPECIFICATIONS

Panel Size:	7 1/6"W x 11 1/4"H 2"D (Behind Panel) 3"D (Front Panel & Handset on Hook)
Weight:	Approximately 6 lbs.
Mounting Instructions:	Flush Mounted Weatherproof Housing (WPP) Weather Resistant Open Enclosure (HOB)
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	Via DTMF Keypad
Memory Retention:	Lithium Battery-Long Life
Input Power:	Telephone Line Powered
Loop Current:	25mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
Hearing Aid Compatible:	Meets EIA standards
UL & FCC Registration:	Certified
ACCESSORIES:	301-064 Security Tool **(only required for installation when in HOB or WPP)**

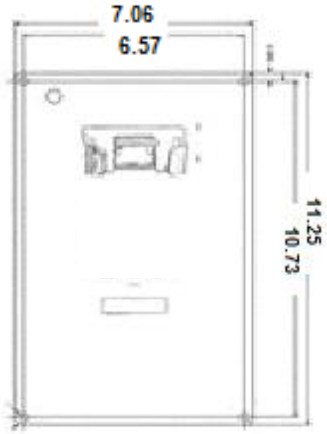

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-M	-IVC	-CCH*	-LB	Open Enclosure Housing	Weatherproof Housing	-RIL
Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts	Internal Volume Control • Push Button Volume Control • Background Noise reduction	Coiled cord available from 5', 10', & 15' (feet). Example: -***CCH5*** 5' Long	Handset w/ internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing **-R** Red Housing **-S** Stainless Steel Housing	Standard Black & TELEPHONE on Door • **-B-EMER** Black & EMERGENCY on Door • **-R** Red & EMERGENCY on Door • **-R-TEL** Red & TELEPHONE on Door • **-Y** Yellow & EMERGENCY on Door • **-Y-TEL** Yellow & Telephone on Door • **-G** Grey & TELEPHONE on Door • **-G-EMER** Grey & EMERGENCY on Door	Ring Indicator Light located on the phone panel for visual ring indication.

CEECO®

Providing Telecommunication Solutions Since 1930

Communication Equipment & Engineering Company

519 SW Park Street
Okeechobee, FL

http;//www.ceeco.net
Voice 863-357-0798

Email: sales@ceeco.net
Fax 863-357-0006