

# SSP-561-D SPECIFICATIONS


## LARGE FLUSH OR WALL MOUNTED HANDSFREE SPEAKERPHONE WITH AUTODIAL PUSH BUTTON

Robust heavy gauge stainless steel flush mount panel handsfree speakerphone that automatically dials a preprogrammed number from 1-11 digits when the button is pushed and red/green LED light provides visual indication of call progress. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Phone is built with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, and tamper resistant security screws. Optional (-SW) stainless steel surface mount box available and ADA features available.



### SPECIFICATIONS

<b>Panel Size:</b>	10.12"W x 13.12"H 2"D (Behind Panel) 2.65"D (With Wall Mounting Box)
<b>Weight:</b>	Approximately 6 lbs.
<b>Mounting Instructions:</b>	Rough-in flush mounting box <b>(Standard)</b> Dimensions: 8.50" W x 11.50"H x 2.75" D 3 mounting holes per side of panel spaced 5.25" apart vertically and two holes spaced 7.8" apart horizontally Surface Wall Mounting Box <b>(-SW)</b> 4 holes spaced 6W" x 9H"
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via Mini Jumpers
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	30mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-037 Security Tool (required for installation When in a Box)

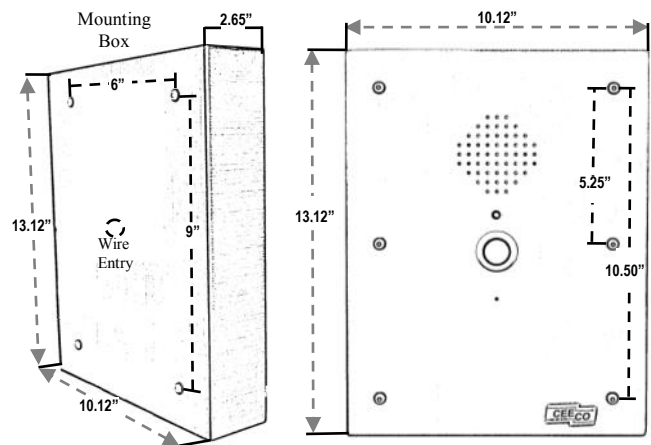

### ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	-SW	-RIL	Standard rough in mounting box	Additional Options & Features
				Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> <li>Red/ green LED call progress indicator light</li> <li>Braille Emergency Plate "EMERG. PHONE"</li> <li>Red Push Button</li> </ul>	Stainless steel wall/ surface mounting box	Ring Indicator Light located on the phone panel for visual ring indication.	Rough-in flush mounting box Dimensions: 8.50" W x 11.50"H x 2.75" D	



Providing Telecommunication Solutions Since 1930

Communication Equipment  
& Engineering Company

519 SW Park Street

Okeechobee, FL

<http://www.ceeco.net>

Voice 863-357-0798

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

Fax 863-357-0006