

SSP-561-FD SPECIFICATIONS



LARGE FLUSH OR WALL MOUNTED HANDSFREE SPEAKERPHONE WITH KEYPAD AND AUTODIAL PUSH BUTTON

Robust heavy gauge stainless steel flush mount or surface mount panel handsfree speakerphone with keypad and automatic dialer. The black push button provides dial tone for keypad operation and the red push button automatically dials a preprogrammed number from 1-11 digits and red/green LED light provides visual indication of call progress. Telephone can be programmed with call restrictions, ability to dial a PBX or access number, allow or block incoming calls, provide timed call-out from 1-9 minutes or no time-out, and 40 (1-11 digits) speed dial locations. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Phone is built with marine quality chrome tone dial keypad, weatherproof, puncture resistant speaker and microphone, instruction or advertising window, and tamper resistant security screws. Optional (-SW) stainless steel surface





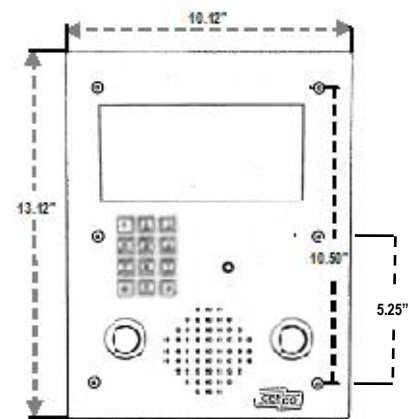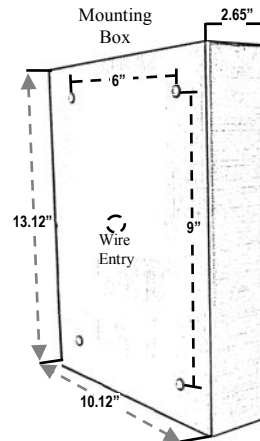

SPECIFICATIONS

Panel Size:	10.12"W x 13.12"H 2"D (Behind Panel) 2.65"D (With Wall Mounting Box)
Weight:	Approximately 6 lbs.
Mounting Instructions:	Rough-in flush mounting box (Standard) Dimensions: 8.50" W x 11.50"H x 2.75" D 3 mounting holes per side of panel spaced 5.25" apart vertically and two holes spaced 7.8" apart horizontally Surface Wall Mounting Box (-SW) 4 holes spaced 6"W" x 9"H"
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	Via Keypad
Input Power:	Telephone Line Powered
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL & FCC Registration:	Certified
ACCESSORIES:	301-037 Security Tool (required for installation When in a Box)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	-SW	-RIL	Standard rough in mounting box	Additional Options & Features
				Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red Push Button 	Stainless steel wall/surface mounting box	Ring Indicator Light located on the phone panel for visual ring indication.	Rough-in flush mounting box Dimensions: 8.50" W x 11.50"H x 2.75" D	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

519 SW Park Street

<http://www.ceeco.net>

Okeechobee, FL

Email: sales@ceeco.net

Voice 863-357-0798

Fax 863-357-0006