

# SSP-571-D SPECIFICATIONS


## STAINLESS STEEL HANDSFREE SPEAKERPHONE PANEL WITH AUTODIAL PUSH BUTTON

Reliable stainless steel handsfree panel speakerphone that automatically dials a preprogrammed number from 1-11 digits when the button is pushed and red LED light to indicate phone is activated. Telephone can be programmed to dial a PBX or access number, block or allow incoming calls, and provide call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with black push button, tamper resistant security screws and weatherproof, puncture resistant speaker and microphone. Optional 371-011 mounting box, 371-012 frame available.



### SPECIFICATIONS

<b>Panel Size:</b>	6.80"W x 9.87"H 2.75"D (Behind Panel) 3" D (w/ Optional Mounting Box)
<b>Weight:</b>	Approximately 7 lbs. Approximately 10 lbs. w/optional mounting box and frame
<b>Mounting:</b>	Flush Mounted Four holes proved on front panel Spaced: 6"W x 9"H Optional Mounting Box available (371-011) <b>Box Dimensions:</b> 7"W x 10"H x 3" D Box Requires: mounting frame (371-012) and four mounting brackets (371-009) <b>Frame Dimensions:</b> 9.56"W x 11.54"H
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
<b>Programming:</b>	Via DTMF Keypad
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	30mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-064 Security Tool

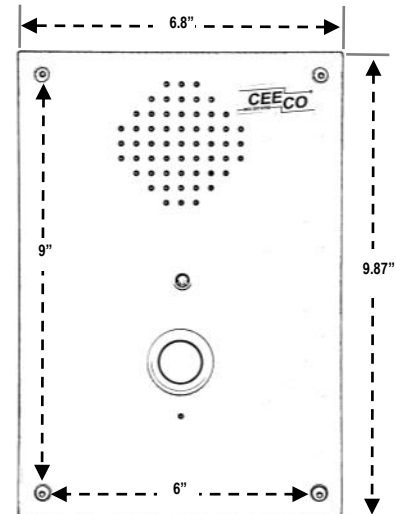

### ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	371-011 Mounting Box	371-012 Mounting Box Frame	371-009 Mounting Bracket	Additional Options & Features
				Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> <li>Red/ green LED call progress indicator light</li> <li>Braille Emergency Plate "EMERG. PHONE"</li> <li>Red Push Button</li> </ul>	Mounting Box that requires the 371-012 frame Dimensions: 7"W x 10"H x 3" D	Frame for mounting box required with purchase of 370-011: Dimensions: 9.56" W x 11.54"H four spaced holes 7.32"W x 10.35" H	Mounting bracket for 571/570 series telephone. 4 brackets are required	



Providing Telecommunication Solutions Since 1930

Communication Equipment  
& Engineering Company

519 SW Park Street

Okeechobee, FL

<http://www.ceeco.net>

Voice 863-357-0798

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

Fax 863-357-0006