


SSP-361-F TELEPHONE

Vandal Resistant, Stainless Steel Panel Telephone Built to Last

CEEEO industrial grade telephone panels are designed to withstand high usage and abuse. The SSP-361-F telephone is a panel telephone with a marine quality chrome tone dial for standard dialing operation. Constructed of high quality 16 gauge brushed stainless steel and equipped with a 32" armored cord handset and mechanical or magnetic hookswitch, the SSP-361-F offers communication you can rely on. These panels include the flush rough-in mounting box and can be flush mounted into a customer's designed mounting or can be mounted on the wall with our optional wall mounting box (-SW).



Made in the USA 

SPECIFICATIONS

INPUT POWER:	C.O. Line Powered
LOOP CURRENT:	23ma min to 80ma max
IMPEDANCE:	600 ohms
HEARING AID COMPATIBLE:	Meets EIA standards
ENVIRONMENTAL:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity 0%-90% non-condensating 0.4A
RINGER EQUIVALENCY:	0.4A
FACEPLATE:	Brushed 16 ga. Stainless Steel
PANEL:	13 1/8"H x 10 1/8" W x 3 1/2" D (Handset on Hook)
OPTIONAL WALL MOUNT:	13 1/8" H x 10 1/8"W x 2 5/8" D
WEIGHT:	10 lbs. (11lbs with Wall Mount Box)
FCC REGISTRATION:	Registered
UL LISTED NO.:	60F5
TYPE JACK:	RJ11C

ACCESSORIES:

301-037	Security Tool (required for installation)
---------	--



Features

Vandal Resistant, Stainless Steel Construction with Security Hardware

I.D. window or optional "Volume" control pushbutton in place of the Small I.D. window

32" Hearing aid compatible armored cord handset, other lengths available

Flush Mount Panel with Rough-In Mounting Box Included or optional Stainless Steel Wall Mount Box (-SW)

Marine quality mechanical hookswitch, optional magnetic hookswitch available


Measurements:

Panel: 13 1/8" H x 10 1/8"W x 3 1/2"D (Handset on Hook)

Wall Mount Box: 13 1/8" H x 10 1/8"W x 2 5/8" D

Analog line powered, VoIP model available

1 Year Warranty and Lifetime Support

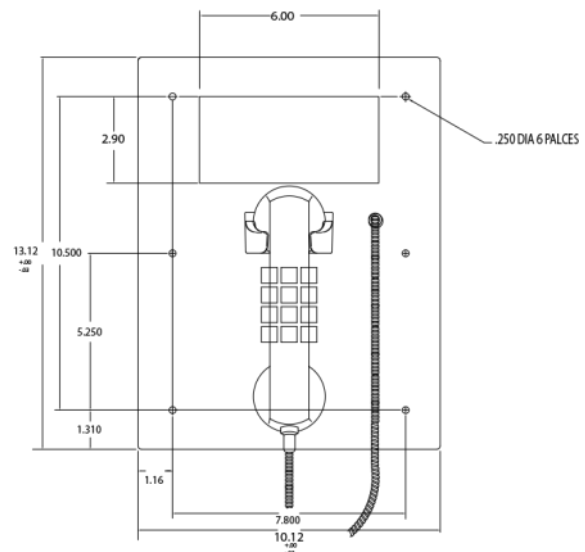

Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

Web: www.ceeco.net

Email: sales@ceeco.net






519 SW Park Street
Okeechobee, FL 34972










Voice 863-357-0798

Fax 863-357-0006

SPP-361-F TELEPHONE

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST

				
SSP-361-F	SSP-363-F-M-IVC	SSP-361-F-IVC-ACHR	SSP-361-F-M-IVC-RIL	SSP-361-F-SW
Our SSP-361-F stainless steel vandal resistant panels, equipped with chrome tone keypad and 32" armored cord handset with steel lanyard, fit in a flush mount style that includes the flush rough-in mounting box or mounted into a customer's designed mounting or can be wall mounted with optional surface	The SSP-363-F-M-IVC Smart Phone model provides call restrictions that include call blocking, allow table for exception numbers, automatic disconnect, automatic dialing of access code when handset is lifted, speed dialing and incoming call block equipped with the sealed magnetic hookswitch (M) and internal	The SSP-361-F-IVC-ACHR model with internal volume control (IVC) with background noise and red handset (ACHR) is commonly used in public areas such as parks, schools, government buildings, or any other location where the need for durable, emergency and/or courtesy phones are required.	The SSP-361-F-M-IVC-RIL model is equipped with the sealed magnetic hookswitch (M) with no moving parts and ring indicator light (RIL). This panel phone is popular in noisy and busy areas where it is necessary to see the phone ringing. Commonly found in dormitory hallways, distribution centers, and	The SSP-361-F-SW is a stainless steel surface/wall mount telephone with chrome tone dial keypad & hookswitch, with armored cord handset. The "-SW" wall/surface mounting box is available for all SSP-361 or 363 telephones making them ideal for all your surface mount applications.
Dimensions: 13 1/8"Hx 10 1/8"Wx 3 1/2"D Weight: 10lbs Product Link: Click here	Dimensions: 13 1/8"Hx 10 1/8"Wx 3 1/2"D Weight: 10lbs Product Link: Click here	Dimensions: 13 1/8"Hx 10 1/8"Wx 3 1/2"D Weight: 10lbs Product Link: Click here	Dimensions: 13 1/8"Hx 10 1/8"Wx 3 1/2"D Weight: 10lbs Product Link: Click here	Dimensions: 13 1/8"Hx 10 1/8"Wx 6 1/8"D Weight: 11lbs Product Link: Click here

ADDITIONAL OPTIONS								
-M	-IVC	-ACH**	-ACH*	-CCH*	-BR	-RIL	-RIS	-SW
								
Sealed Magnetic Hookswitch that uses standard handset. (no moving parts)	ADA compliant push button volume control and background noise reducer. (Built into phone)	Other Length armored cord from 12" to 72"(inches). IE: ACH18 is 18" Long (12" Handset hangs upside down)	ACHW -White Handset ACHR -Red Handset (Black is standard)	Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long	Braille "EMERGENCY PHONE" emergency Plate	Ring Indicator Light located on the phone panel for visual ring indication.	Ring Indicator Flashing Blue Light continuously lit and flashes during call duration (Requires AC Power)	Stainless steel surface/wall mounting box for SSP-361, 363, 560, and 561 Telephones.

IP - Voice over Internet Protocol Version available on all models (SIP)

CUSTOMIZATION - Call us for additional options and features

Visit our website at www.ceeco.net or call us at 863-357-0798 for detailed specifications on any of our models.

CEECO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEECO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product.

We offer support for the life of the product! CEECO is devoted to giving you the quality and service you deserve.



Providing Telecommunication Solutions Since 1930

Communication Equipment & Engineering Company

Web: www.ceeco.net

Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006