

HOB-531-D SPECIFICATIONS

HANDSFREE SPEAKERPHONE WITH PUSH BUTTON AUTODIAL IN OPEN ENCLOSURE STEEL HOUSING


Standard Analog Power, but also available in VoIP versions

Weather and vandal resistant stainless steel handsfree speakerphone in an open enclosure wall mount black housing with telephone symbol on sides. Designed with push button for ring-down operation and red/green LED light provides visual indication of call progress. Telephone can be programmed to time out calls from 1-9 minutes or no time out and block or allow incoming calls. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Phone relies on external equipment to control calling. Equipped with a weatherproof, puncture resistant speaker and microphone, industrial quality pushbutton, and tamper resistant security screws. ADA Emergency features Available. Weather resistant open enclosure housing available in black, (-R) red, or (-S) stainless steel.





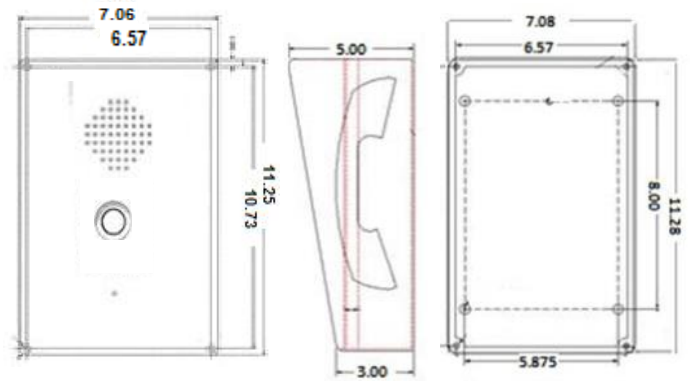

SPECIFICATIONS

Panel Size:	7 1/6"W x 11 1/4"H
Open Enclosure Housing:	7 1/4"W x 11 1/2"H x 5"D
Weight:	Approximately 10 lbs.
Mounting Instructions:	Open Enclosure Housing 4 holes spaced 8" x 5 7/8"
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	Via DTMF Keypad
Input Power:	Telephone Line Powered
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL & FCC Registration:	Certified
ACCESSORIES:	301-064 Security Tool (required for installation)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	Open Enclosure Housing	-RIS	-RIL	Additional Options & Features
				Auto Answer (AA) Voice Active (VA) Auto Answer (AA)
<ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button 	Standard Black Housing -R Red Housing -S Stainless Steel Housing	Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company
<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006