

# HOB-531-F SPECIFICATIONS

## HANDSFREE SPEAKERPHONE WITH A KEYPAD IN OPEN ENCLOSURE STEEL HOUSING


Standard Analog Power, but also available in VoIP versions

Weather and vandal resistant stainless steel handsfree speakerphone in an open enclosure wall mount black housing with telephone symbol on sides. Designed with marine quality chrome tone dial keypad or optional Braille keypad, push button for dial tone, and red/green LED light provides visual indication of call progress. Telephone can be programmed with call restrictions, ability to dial a PBX or access number, allow or block incoming calls, provide call time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with a weatherproof, puncture resistant speaker and microphone, industrial quality push button, and tamper resistant security screws. Weather resistant open enclosure housing available in black, (-R) red, or (-S) stainless steel.



### SPECIFICATIONS

|                                   |   |
|-----------------------------------|---|
| <b>Panel Size:</b>                | 7 1/6"W x 11 1/4"H  |
| <b>Open Enclosure Housing:</b>    | 7 1/4"W x 11 1/2"H x 5"D  |
| <b>Weight:</b>                    | Approximately 10 lbs.   |
| <b>Mounting Instructions:</b>     | Open Enclosure Housing<br>4 holes spaced 8" x 5 7/8"                            |
| <b>Environment:</b>               | Temperature: -30°C (-22°F) to 60°C (140°F)<br>Humidity: 0%-90% non-condensating |
| <b>Programming:</b>               | Via DTMF Keypad   |
| <b>Input Power:</b>               | Telephone Line Powered  |
| <b>Loop Current:</b>              | 30mA min to 80mA max  |
| <b>Impedance:</b>                 | 600 ohms  |
| <b>Type Jack:</b>                 | RJ11C   |
| <b>Ringer Equivalency:</b>        | 0.4A  |
| <b>UL &amp; FCC Registration:</b> | Certified   |
| <b>ACCESSORIES:</b>               | 301-064 Security Tool<br>(required for installation)                            |

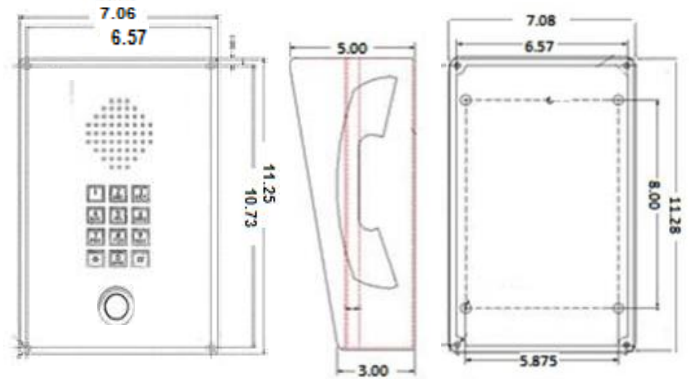

### ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

| Open Enclosure Housing   | -RIS   | -RIL   | Additional Options & Features                             |
|--|--|--|---|
|  |  |  | Auto Answer (AA)<br>Voice Active (VA)<br>Auto Answer (AA) |
| Standard Black Housing<br>-R Red Housing<br>-S Stainless Steel Housing | Ring Indicator Flashing Blue Light<br><i>(Requires AC Power)</i> | Ring Indicator Light located on the phone panel for visual ring indication |   |



Providing Telecommunication Solutions Since 1930

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>

Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006