

SSC-500-X SPECIFICATIONS

LOW POWER SPEAKERPHONE WITH AUTODIAL FOR RING-DOWN OPERATION

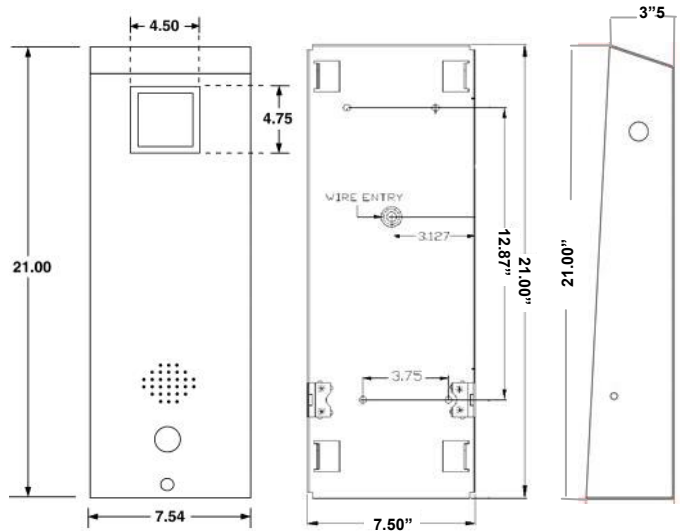
Standard Analog Power, but also available in VoIP versions

Stainless steel wall mount payphone size handsfree low power consumption speakerphone with push button for ring-down operation and red LED light to indicate phone is activated. Press button to disconnect call. Telephone can be programmed to cancel calls after 1, 3, or 5 minutes or no call time-out. Phone relies on external equipment to control calling. Equipped with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.






SPECIFICATIONS

- Panel Size:** 7.5" W x 21" H x 4.10" D
- Weight:** Approximately 16 lbs.
- Mounting Instructions:** **Vertical Surface Mount:** Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided
- Environment:** Temperature: -30°C (-22°F) to 60°C (140°F)
Humidity: 0%-90% non-condensating
- Input Power:** Telephone Line Powered
- Loop Current:** 27mA min to 80mA max
- Impedance:** 600 ohms
- Type Jack:** RJ11C
- Ringer Equivalency:** 0.4A
- UL & FCC Registration:** Certified
- ACCESSORIES:** 301-037 Security Tool
(required for installation)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	-RIS	-RIL	Additional Options & Features
 <ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button 	 <p>Ring Indicator Flashing Blue Light (Requires AC Power)</p>	 <p>Ring Indicator Light located on the phone panel for visual ring indication</p>	<ul style="list-style-type: none"> Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

http://www.ceeco.net
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006