

SSC-501-X SPECIFICATIONS

HANDSFREE AUTODIAL SPEAKERPHONE FOR RING-DOWN OPERATION


Standard Analog Power, but also available in VoIP versions

Stainless steel wall mount payphone size handsfree speakerphone with push button for ring-down operation and red/green LED light provides visual indication of call progress. Telephone can be programmed to time out calls from 1-9 minutes or no time out and block or allow incoming calls. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Phone relies on external equipment to control calling. Equipped with weatherproof and puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.



SPECIFICATIONS

Panel Size:	7.5" W x 21" H x 4.10" D
Weight:	Approximately 16 lbs.
Mounting Instructions:	Vertical Surface Mount: Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Programming:	Via DTMF Keypad
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL & FCC Registration:	Certified
ACCESSORIES:	301-037 Security Tool (required for installation)

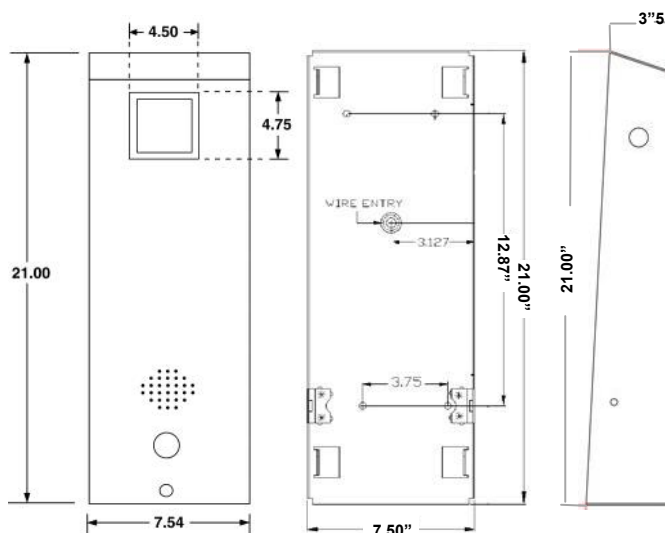

ADDITIONAL OPTIONS		IP - Voice over Internet Protocol Version available on all models (SIP)	
-ADA	-RIS	-RIL	Additional Options & Features
			Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button 	Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company
<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006